
FLUID LINE



Condensate Dampening Pot

Local regulations may restrict the use of this product to below the conditions quoted. In the interests of development and improvement of the product, we reserve the right to change the specification without notice.




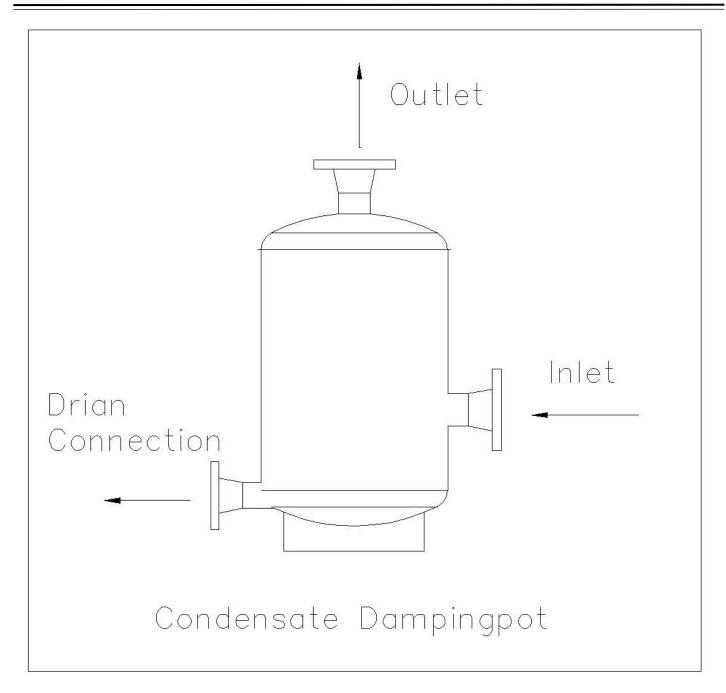



Condensate Dampening Pot

Local regulations may restrict the use of this product to below the conditions quoted. In the interests of development and improvement of the product, we reserve the right to change the specification without notice.

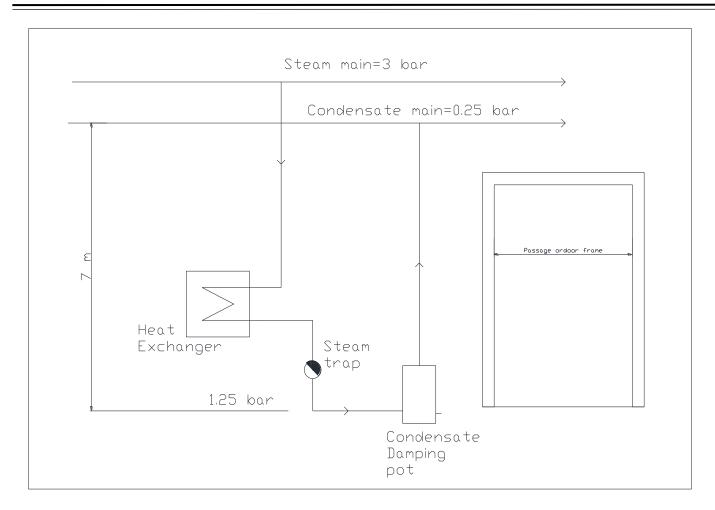

Technical Data

| service pressure | Related temperature | Capacity range | Material | Volume [l] |
|------------------|---------------------|----------------|-------------------|------------|
| 18 bar | 250°C | up to 15 t/h | S235JRG2 / P265GH | 4 to 50 |

Description

The condensate dampening pot provides a cushioning effect to neutralize water hammer. The condensate is discharged without noise. Application Steam and condensate systems.